


### Valve Specifications

Body	Polypropylene
Bonnet	Polypropylene
Diaphragm	N.P
Spring	Stainless Steel
Seat	Polypropylene
Bolts	Stainless Steel

### Valve Dimensions

Size		Material	Connections	Length		Height		Width		Weight	
Inch	mm			Inch	mm	Inch	mm	Inch	mm	Lbs	kg
2S	50	Polypropylene	Threaded	9.33	237	4.49	114	6.18	157	2.84	1.29
2.5	63	Polypropylene	Threaded	10.2	259	4.76	121	6.18	157	3.04	1.38
3N	80	Polypropylene	Threaded	10.91	277	5.12	130	6.18	157	3.31	1.50
3N	80	Polypropylene	Flanged	11.14	283	7.8	198	7.8	198	5.59	2.54
3N	80	Polypropylene	Grooved	10.11	257	4.76	121	6.18	157	2.95	1.34
3S	80	Polypropylene	Threaded	12.2	310	6.61	168	9.29	236	8.10	3.68
3S	80	Polypropylene	Grooved	12.2	310	6.61	153	9.29	236	7.15	3.25
3S	80	Polypropylene	Flanged	12.2	310	7.87	200	9.29	236	9.9	4.5
4	100	Polypropylene	Threaded	13.78	350	7.12	181	9.29	236	8.89	4.04
4	100	Polypropylene	Grooved	13.78	350	6.5	165	9.29	236	7.75	3.52
4	100	Polypropylene	Flanged	13.78	350	8.98	228	9.29	236	11.2	5.08

### Flow Chart paz plastic valve

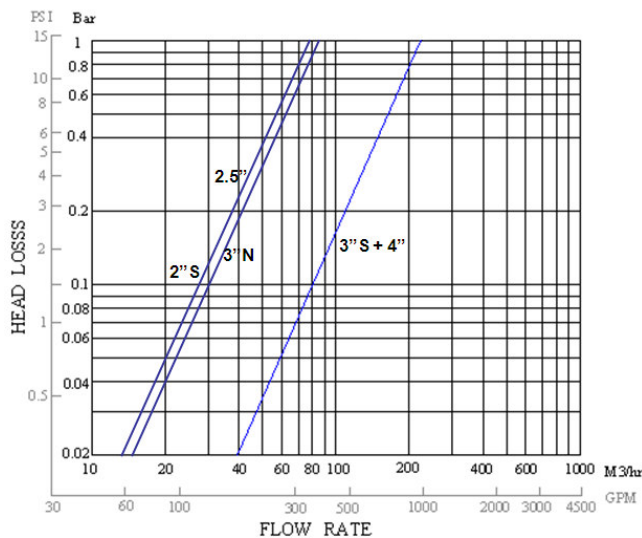

### Features:

- Low pressure loss
- Working pressure from 4m
- Quick regulating response
- Low operational costs
- Accurate regulation in a wide flow range
- Simple Structure
- Very low maintenance
- Smooth open/close
- Long lasting reliability
- Chemical resistant

